




Mizu Block Basin Mixer

Technical Information

| Recommended use | Domestic, hotel and commercial |
|--------------------------|---|
| Colour availability | Chrome |
| | Matte Black |
| | |
| | ** NOTE ** |
| | Unless otherwise specified price advertised on website are for |
| | Chrome finish only |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| Pressure rating | Maximum continuous operating pressure 1000kPa. |
| | For best performance and longer life we recommend 150-500kPa. |
| | Hot and cold water inlet pressure should be equal. |
| Temperature rating | Maximum continuous working temperature 80° |
| WELS | 4* rating |
| | 7.5L per minute |
| Suitable Hot Water Units | |
| | Storage tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable |
| Standards | AS/NZS 3718 |

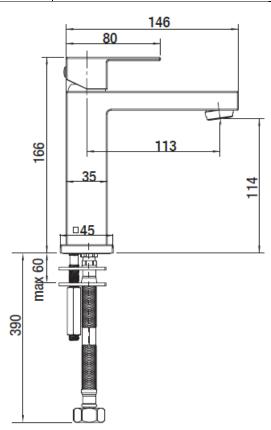

Registered in Australia: ABN: 29 168 696 204

Plumbing & Gas Licence: PL8621 / GS015660

Email: reception@mackieplumbingperth.com.au